

# Low Noise 400 kHz Photoreceiver with InGaAs-PIN Photodiode



The picture shows model LCA-S-400K-IN-FS.  
The photoreceiver will be delivered without post holder and post.

<p>Features</p>	<ul style="list-style-type: none"> <li>• InGaAs-PIN photodiode, 0.5 mm active diameter</li> <li>• Bandwidth DC – 400 kHz</li> <li>• Amplifier transimpedance gain <math>1.0 \times 10^7</math> V/A</li> <li>• Max. conversion gain <math>9.5 \times 10^6</math> V/W @ 1550 nm</li> <li>• Spectral range 900 – 1700 nm</li> <li>• Free-space input 1.035"-40 threaded, alternatively 25 mm diameter unthreaded</li> <li>• Easily convertible to fiber optic input (FC and FSMA) with optionally available screw-on adapters</li> <li>• UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread</li> </ul>
<p>Applications</p>	<ul style="list-style-type: none"> <li>• NIR Spectroscopy</li> <li>• General purpose opto-electronic measurements</li> <li>• Optical front-end for oscilloscopes, A/D converters and lock-in amplifiers</li> </ul>
<p>Block Diagram</p>	<p>The block diagram illustrates the internal circuitry. It starts with an 'OPTICAL INPUT' leading to a photodiode. The photodiode is connected to a bias source and an 'I/V' (transimpedance) amplifier. The feedback path of the I/V amplifier includes a resistor 'Rf' and an 'Offset Nulling' block. The output of the I/V amplifier is connected to a 'Buffer Amplifier', which produces the 'VOLTAGE OUTPUT'.</p>

BS01-LCA-S\_R01

## Low Noise 400 kHz Photoreceiver with InGaAs-PIN Photodiode

Available Versions

LCA-S-400K-IN-FST



Picture shows 1.035"-40 threaded flange with internally threaded coupler ring (outer diameter 30 mm)

1.035"-40 threaded flange for free space applications, compatible with many optical standard accessories and for use with various types of fiber connector adapters.


Optionally available:

Fiber adapters PRA-FC, PRA-FCA and PRA-FSMA.

The coupling efficiency will depend on fiber type.

With the relative large 0.5 mm dia. photodiode installed in the LCA-S-400K-IN input coupling is not critical. However, standard SM 9/125 fibers (PC or APC) with low numerical aperture (NA) are recommended for ensuring near 100% coupling efficiency.

LCA-S-400K-IN-FS



Picture shows unthreaded flange with 25 mm diameter

25 mm dia. unthreaded flange for free space applications. Compatible with many optical standard accessories.

Related Models

LCA-S-400K-SI-FST

Si-PIN, Ø 3 mm, 320 - 1060 nm  
free space input, 1.035"-40 threaded flange

LCA-S-400K-SI-FS

Si-PIN, Ø 3 mm, 320 - 1060 nm  
free space input, 25 mm dia. unthreaded flange

Available Accessories

PRA-FC  
PRA-FCA  
PRA-FSMA



Fiber-adapter with external 1.035"-40 thread (suitable for FST models only).

PRA-PAP



Alternative mounting option:  
Post adapter plate, easy to mount on FEMTO photoreceiver series OE, FWPR, PWPR, HCA-S and LCA-S.

PS-15-25-L




Power supply  
Input: 100 – 240 VAC  
Output: ±15 VDC

## Low Noise 400 kHz Photoreceiver with InGaAs-PIN Photodiode

Specifications	Test conditions	$V_S = \pm 15\text{ V}$ , $T_A = 25\text{ }^\circ\text{C}$ , output load impedance $1\text{ M}\Omega$ , warm-up 20 minutes (min. 10 minutes recommended)
Gain	Transimpedance gain Gain accuracy Conversion gain	$1.0 \times 10^7\text{ V/A}$ (@ output load $\geq 100\text{ k}\Omega$ ) $\pm 1\%$ (electrical) $9.5 \times 10^6\text{ V/W typ.}$ (@ $1550\text{ nm}$ , output load $\geq 100\text{ k}\Omega$ )
Frequency Response	Lower cut-off frequency Upper cut-off frequency (-3 dB) Gain flatness	DC 400 kHz $\pm 0.5\text{ dB}$
Time Response	Rise/fall time (10 % – 90 %)	1 $\mu\text{s}$
Input	Noise equivalent power (NEP) Optical saturation power Input offset compensation range	$75\text{ fW}/\sqrt{\text{Hz}}$ (@ $1550\text{ nm}$ , 10 kHz) 1 $\mu\text{W}$ (for linear amplification, @ $1550\text{ nm}$ ) $\pm 300\text{ nA}$ , adjustable by offset potentiometer
Detector	Detector Active area Spectral range Max. sensitivity	InGaAs-PIN photodiode $\varnothing 0.5\text{ mm}$ 900 – 1700 nm $0.95\text{ A/W typ.}$ (@ $1550\text{ nm}$ )
Output	Output voltage range Output impedance Max. output current Output noise	$-3\text{ V} \dots +10\text{ V}$ (@ $\geq 100\text{ k}\Omega$ output load) $50\ \Omega$ (terminate with $\geq 100\text{ k}\Omega$ load) 30 mA (short-circuit proof) 2 $\text{mV}_{\text{RMS}}$ (12 $\text{mV}_{\text{PP}}$ ) typ. (@ $\geq 100\text{ k}\Omega$ load, no signal on detector, measurement bandwidth 1 MHz)
Input Flange	Material	1.4305 stainless steel, nickel-plated (FST flange) AlMg4.5Mn, nickel-plated (FS flange)
Coupler Ring (FST version only)	Material	1.4305 stainless steel, glass bead blasted
Power Supply	Supply voltage Supply current	$\pm 15\text{ V}$ ( $\pm 14.5\text{ V} \dots \pm 16.5\text{ V}$ ) $\pm 40\text{ mA}$ (depends on operating conditions, recommended power supply capability min. $\pm 150\text{ mA}$ )
Case	Weight Material	212 g (0.47 lbs) LCA-S-400K-IN-FST incl. coupler ring 195 g (0.43 lbs) LCA-S-400K-IN-FS AlMg4.5Mn, nickel-plated
Temperature Range	Storage temperature Operating temperature	$-30\text{ }^\circ\text{C} \dots +85\text{ }^\circ\text{C}$ $0\text{ }^\circ\text{C} \dots +60\text{ }^\circ\text{C}$


Absolute Maximum Ratings	Optical input power (CW) Power supply voltage	10 mW $\pm 20\text{ V}$
--------------------------	--	----------------------------

## Low Noise 400 kHz Photoreceiver with InGaAs-PIN Photodiode

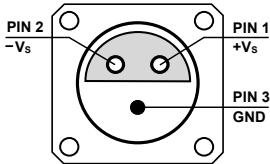Connectors	<p>Input</p> <p style="margin-left: 40px;">LCA-S-400K-IN-FST      1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories</p> <p style="margin-left: 40px;">LCA-S-400K-IN-FS      25 mm dia. unthreaded flange for free space applications</p> <p>Output</p> <p style="margin-left: 40px;">BNC jack (female)</p> <p>Power supply</p> <p style="margin-left: 40px;">LEMO® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)</p>
	
<p style="margin-left: 40px;">Pin 1: +15 V Pin 2: -15 V Pin 3: GND</p>	

Scope of Delivery	LCA-S-400K-IN, internally threaded coupler ring (FST version only), LEMO® 3-pin connector, datasheet, transport package
-------------------	---


Ordering Information	<p>LCA-S-400K-IN-FST      1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories.</p> <p>LCA-S-400K-IN-FS      25 mm dia. unthreaded flange for free space applications.</p>
----------------------	--

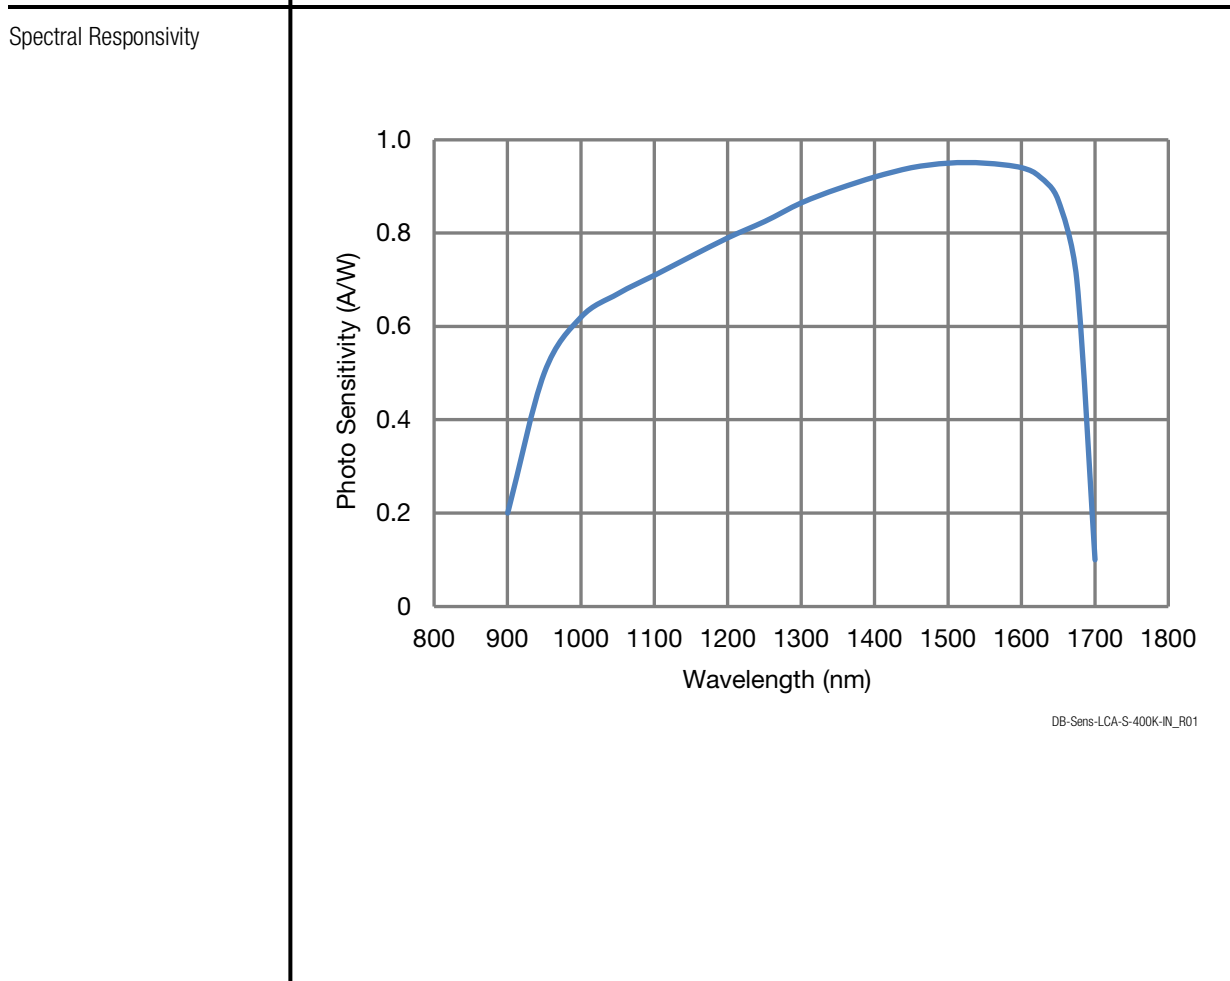

## Low Noise 400 kHz Photoreceiver with InGaAs-PIN Photodiode

Dimensions

LCA-S-400K-IN-FST (1.035"-40 threaded free space input)

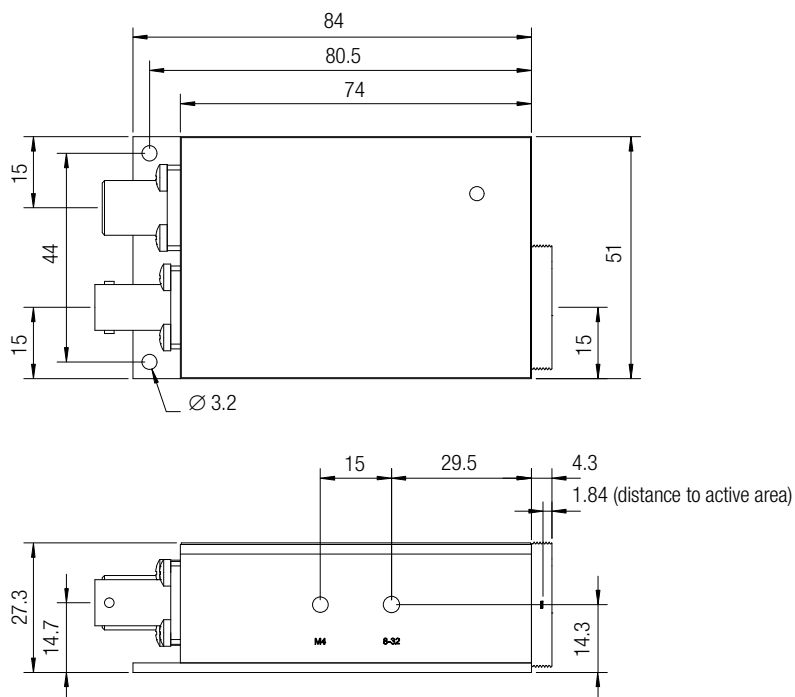


DZ\_LCA-S-400K-IN-FST\_R1

all dimensions in mm unless otherwise noted

# Low Noise 400 kHz Photoreceiver with InGaAs-PIN Photodiode

Dimensions (continued)

LCA-S-400K-IN-FS (25 mm dia. unthreaded free space input)

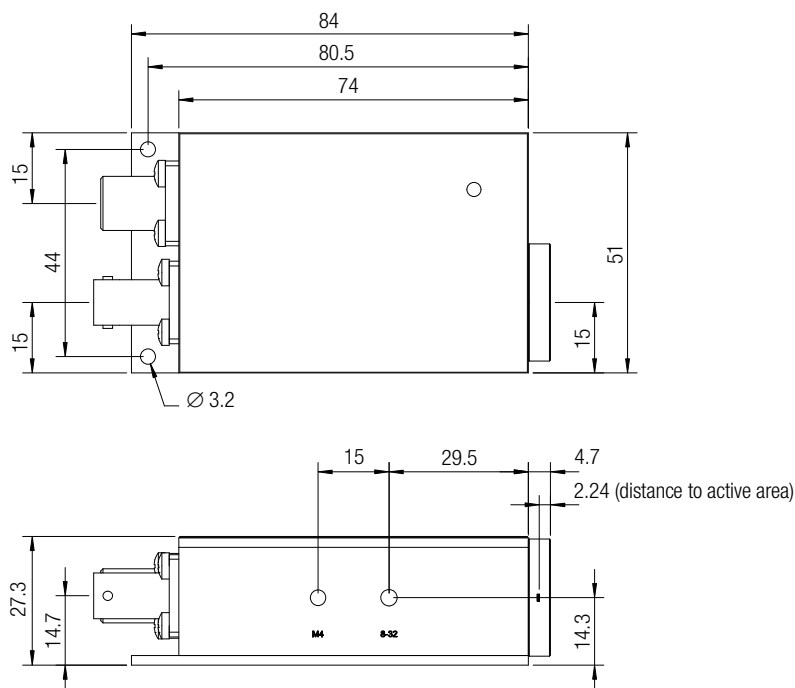

DZ\_LCA-S-400K-IN-FS\_R1

all dimensions in mm unless otherwise noted

FEMTO Messtechnik GmbH  
 Klosterstr. 64  
 10179 Berlin · Germany  
 Phone: +49 30 280 4711-0  
 Fax: +49 30 280 4711-11  
 Email: info@femto.de  
 www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany