

# A2L Series

2 Socket MIL-Style, Polycarbonate Molded Hydraulic Hose Connector, Permanent Mount, 212 °F (100 °C) Max Temp





VIBRATION ANALYSIS HARDWARE

## Product Features

Compatible with CTC CB500 Series Hydraulic Hose Protected Cabling

- ▶ 2 Socket Connection for use with CTC Standard & Compact Size, Single Axis Sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

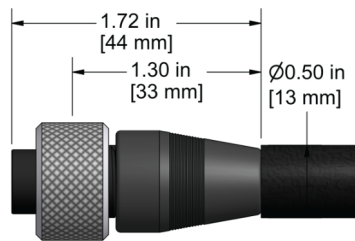

## Specifications

Application	Permanent Mount
Max Temperature	212° F (100° C)
Connector Type	2 Socket MIL-Style Hydraulic Hose
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-)

**Built to Order**

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900