

D2D Series




VIBRATION ANALYSIS HARDWARE

2 Socket MIL-Spec Right-Angle Connector, Polyurethane Molded,
Portable Measurement, 250 °F (121 °C) Max Temp



Product Features

- ▶ 2 Socket Connection
- ▶ Polyurethane Molded
- ▶ IP64 Rated

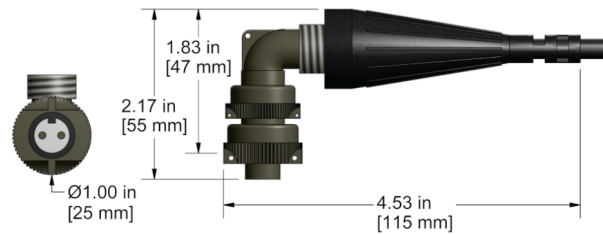

Specifications

Application	Portable Measurements
Max Temperature	250° F (121° C)
Connector Type	Right-Angle MIL-Spec
Shell Material	Polyurethane Molded Backshell
Pin Contact Material	Aluminum Alloy
Rating	IP64
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900