J2NG Series




2 Socket Mini-MIL Connector with Grounded Backshell, Nylon Molded, Permanent Measurements, 250 °F (121 °C) Max Temp

Product Features

Grounded Backshell is ideal for use with Intrinsically Safe Applications

- ▶ 2 Socket Mini-MIL Connection for use with CTC Miniature Size Accelerometers
- Designed to Withstand a Wide Variety of Industrial Applications
- 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance



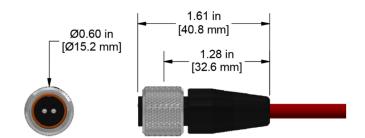

| Specifications | |
|---------------------------|-------------------|
| Application | Permanent Mount |
| Max Temperature | 250° F (121° C) |
| Connector Type | 2 Socket Mini-MIL |
| Shell Material | Nylon |
| Connector Insert Material | Nylon |
| Rating | IP68 |
| Pin-Out | A = Signal (+) |
| | B = Common (-) |

Built to Order