

J4A Series




4 Socket Mini-MIL Connector for CTC 4 Pin Triaxial Accelerometers, Polycarbonate Molded, Permanent Mount, 250 °F (121 °C) Max Temp

VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ 4 Socket Mini-MIL Connection for use with CTC Triaxial Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

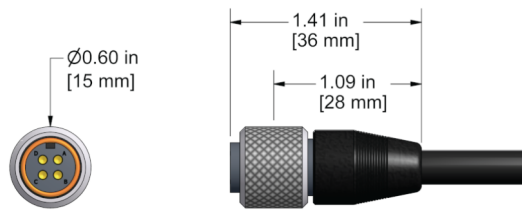

Specifications

Application	Permanent Mount
Max Temperature	250° F (121° C)
Connector Type	4 Socket Mini-MIL
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	Socket A = Ch. Y (+), Red Conductor Socket B = Ch. X (+), Green Conductor Socket C = Ch. Z (+), White Conductor Socket D = Common (-), Black Conductor

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900