

JV2R Series




VIBRATION ANALYSIS HARDWARE

High Temperature, 2 Socket Mini-MIL Seal-Tight Viton® Boot Connector with PPS Insert, for use with CTC Miniature Industrial 2 Pin Accelerometers, Permanent Mount, 350 °F (177 °C) Max Temp

Product Features

High Temperature Resistance up to 350 °F (177 °C)

- ▶ 2 Socket Mini-MIL Connection for use with CTC Miniature Size Accelerometers
- ▶ Ideal for Hot, Wet & Caustic Environments
- ▶ Creates an IP69 Rated Seal

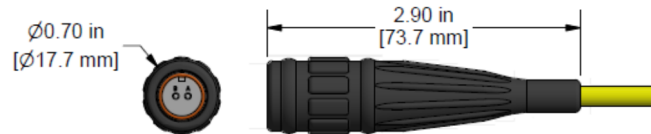

Specifications

Application	Permanent Mount
Max Temperature	350 °F (177 °C) Max Temp
Connector Type	2 Socket Viton® Seal Boot
Shell Material	Viton®
Connector Insert Material	PPS
Rating	IP69
Pin-Out	A = Signal (+) Red B = Common (-) Black

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900