

# M4A Series

5 Socket M12, Polycarbonate Molded Connector, for use with 4 Conductor Cables, Permanent Mount, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



## Product Features

- ▶ 5 Socket M12 Connection with 4 Live Sockets, for use with CTC Triaxial, M12 Connector Exit Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

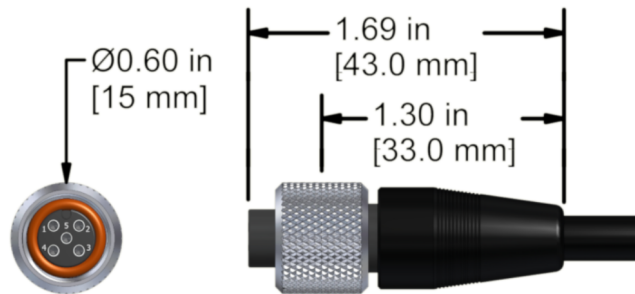

## Specifications

Application	Permanent Measurements
Max Temperature	250 °F (121 °C)
Connector Type	5 Socket M12 Connector
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	Socket 1 = Ch. Y (+) , Red Conductor Socket 2 = Ch. X (+), Green Conductor Socket 3 = Ch. Z (+), White Conductor Socket 4 = Common (-), Black Conductor

**Built to Order**

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900