

# MV4R4 Series




VIBRATION ANALYSIS HARDWARE

5 Socket M12, PPS Insert, Seal-Tight Viton® Boot Connector, for use with 6 Conductor Cables, Permanent Mount, 350 °F (177 °C) Max Temp

## Product Features

High Temperature Resistance up to 350 °F (177 °C)

- ▶ 5 Socket M12 Connection with 4 Live Sockets, for use with CTC TR207 & TR208 High Temperature Resistance RTD Sensors & 4 Wire RTD Systems
- ▶ Ideal for Hot, Wet & Caustic Environments
- ▶ Creates an IP69 Rated Seal

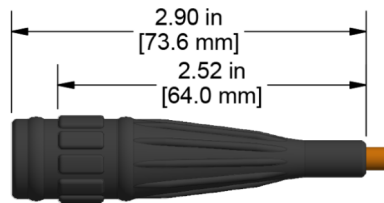

## Specifications

Application	Permanent Measurements
Max Temperature	350 °F (177 °C) Max Temp
Connector Type	5 Socket M12 Viton® Boot Connector
Shell Material	Viton®
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP69
Pin-Out	1 = Ch. Y (+) 2 = Common (-) 3 = Ch. Z (+) 4 = Ch. X (+)

**Built to Order**

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900