


R2C Series

2 Pin MIL-Spec Connector with Rubber Bending Strain Relief,
Polyurethane Molded, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE

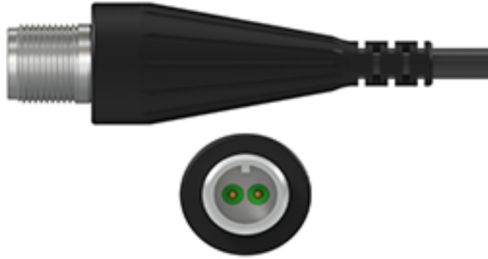

Product Features

Designed to Build Extension Cables with 2 Conductor Cabling

- ▶ Mates with CTC 2 Socket MIL-Style Connectors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ Creates an IP66 Rated Seal

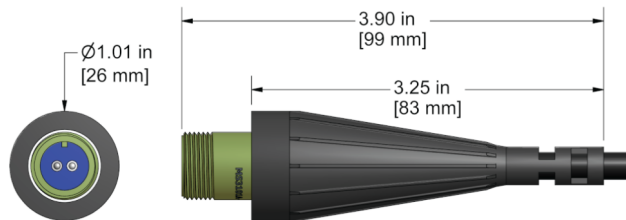

Specifications

Application	Portable Measurements Permanent Mount
Max Temperature	250° F (121°C)
Connector Type	2 Pin MIL-Style
Shell Material	Polyurethane Molded
Connector Insert Material	Polyurethane
Rating	IP66
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900