

# IMP+ I.S.

## Technical Specifications:

IMP+ I.S. is a combined transducer and controller in one self-contained unit and is I.S. certified to ATEX EEx ia IIC T4 and IECEx. IMP+ I.S. benefits from a specially designed digital echo processing technique and is available in three versions, 3 m, 6 m, or 10 m (9.8 ft, 19.7 ft, or 32.8 ft) range. The full IMP range is available with the wetted parts in PVDF build alternative for corrosive or aggressive applications.



### PHYSICAL

<b>Controller Body Dimensions:</b>	186 mm H x 133 mm D (5.2 in x 7.3 in)
<b>Weight:</b>	Nominal 1 kg (2.2 lb)
<b>Cable Entry Detail:</b>	2 off cable glands 4.5 mm to 10 mm (0.18 in to 0.4 in); <i>Torque to 2 NM</i>
<b>Mounting:</b>	1.5" BSP/NPT (IMP3 & IMP6), 2" BSP/NPT (IMP10)

### ENVIRONMENTAL

<b>IP Rating:</b>	IP67
<b>Temp. Range (Process):</b>	-40 °C to +80 °C (-40° F to +176 °F)
<b>Temp. Range (Ambient):</b>	-20 °C to +65 °C (-4 °F to +149 °F)

### IMP3

<b>Beam Angle (-3dB Half Power):</b>	<10° inclusive
<b>Operating Frequency:</b>	125 kHz
<b>Measurement Range:</b>	200 mm to 3 m (7.9 in to 9.8 ft)

### IMP6

<b>Beam Angle (-3dB Half Power):</b>	<10° inclusive
<b>Operating Frequency:</b>	75 kHz
<b>Measurement Range:</b>	300 mm to 6 m (11.8 in to 19.7 ft)

### IMP10

<b>Beam Angle (-3dB Half Power):</b>	<10° inclusive
<b>Operating Frequency:</b>	41 kHz
<b>Measurement Range:</b>	300 mm to 10 m (11.8 in to 32.8 ft)

### APPROVALS

<b>CE Approval:</b>	Listed in the Certificate of Conformity within the manual
<b>ATEX Approval:</b>	Ex II 1G EEx ia IIC T4 (Tamb = -40 °C to +80 °C)


### PERFORMANCE

<b>Input Voltage:</b>	11-30 V, 3.5-22mA
<b>Accuracy:</b>	± 0.25% or 6 mm (0.2 in), <i>whichever is greater</i>
<b>Resolution:</b>	± 0.1% or 2 mm (0.2 in), <i>whichever is greater</i>


<b>4-20mA Outputs:</b>	Resolution 5 $\mu$ A (both active and passive outputs)
<b>Temperature Compensation:</b>	Via internal temperature sensor ( $\pm 0.5$ °C (32.9 °F) accuracy). Level and volume conversions are installed allowing linearization for tank shapes
<b>PC Interface-PC Suite:</b>	All parameters can be accessed and changed through PC Suite software. Echo traces may be viewed on-screen.

## 2 WIRE CONFIGURATION FEATURES

- 4-digit LCD display
- 4 button keypad for parameter entry

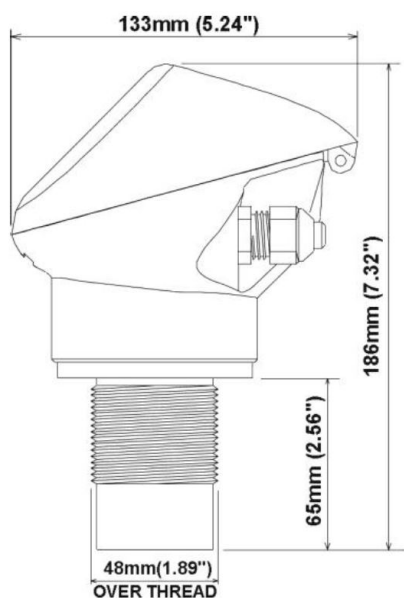

IMP drawing side

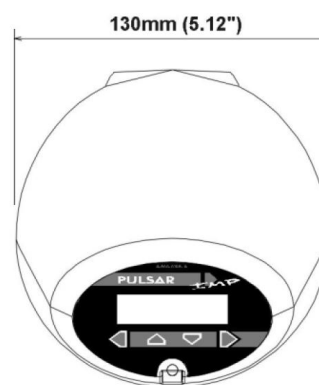

IMP drawing top



INFO@PULSARMEASUREMENT.COM

*Pulsar Measurement is a trading name of Pulsar Process Measurement, Ltd.*

*Copyright © 2020 Pulsar Measurement  
Registered Address: 1 Chamberlain Square CS, Birmingham B3 3AX  
Registered No.: 3345604 England & Wales*

## Delivering the Measure of Possibility

**United States**  
11451 Belcher Road South  
Largo, FL 33773  
+1 888-473-9546

**Canada**  
16456 Sixsmith Drive  
Long Sault, Ont. K0C 1P0  
+1 855-300-9151

**United Kingdom**  
Cardinal Building, Enigma  
Commercial Centre  
Sandy's Road, Malvern WR14 1JJ  
+44 (0) 1684 891371

Rev 4.0