

M4TR2 Series




VIBRATION ANALYSIS HARDWARE

5 Socket M12, Polycarbonate Molded Connector, for use with 2 Wire RTD Sensors, Permanent Mount, 250 °F (121 °C)

Product Features

- ▶ 5 Socket M12 Connection with 4 Live Sockets, for use with CTC TR102 & TR104 RTD Sensors & 2 Wire RTD Systems
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

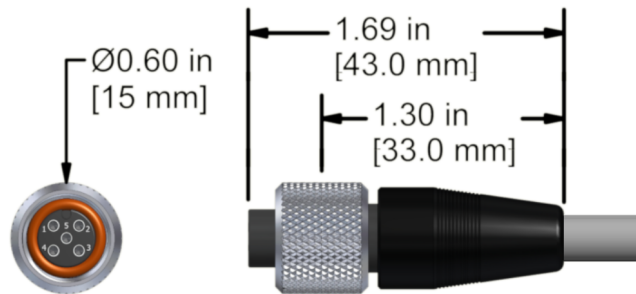

Specifications

Application	Permanent Measurement
Max Temperature	250°F (121°C)
Temperature Range	250 °F (121 °C)
Connector Type	5 Socket M12
Shell Material	Polycarbonate
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	1 = Vibration Signal (+) (Red) 2 = Common (-) (Green) 3 = RTD (White) 4 = RTD (Black)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900